
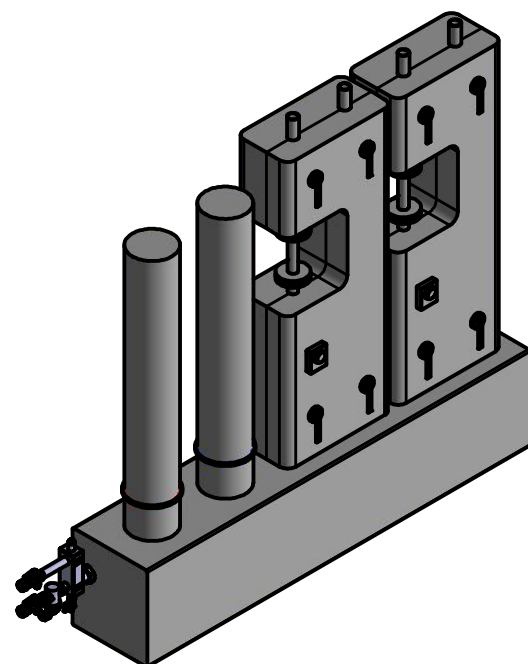


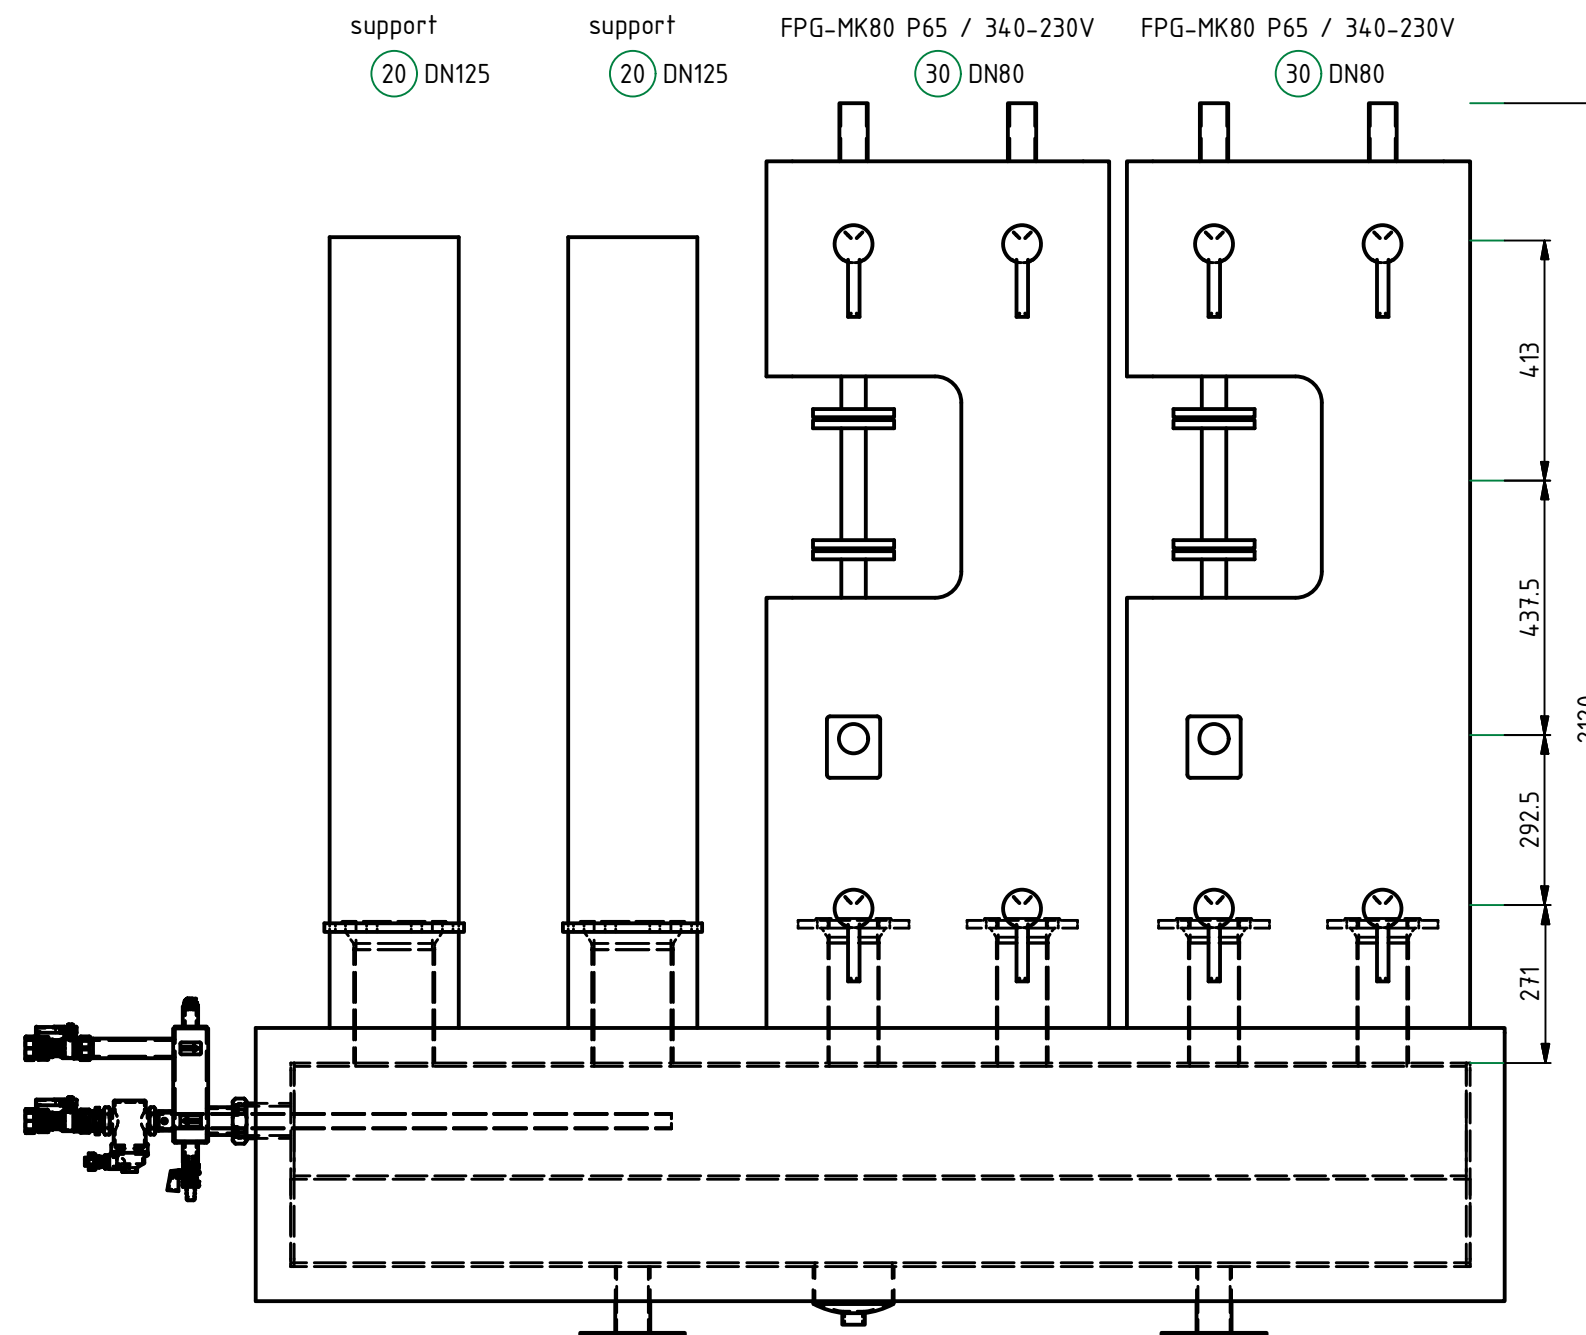

PRO SINUS[®]X

ProfiFixx 1600 kW, 6 racorduri, Bucuresti

Selection: HydroFixx + ProfiFixx 300/350

Facility: heating

Material: steel

Corpus length [mm]: 2028

Design pressure [bar]: 6

Design temperature [°C]: 110

Throughput (selected) [m³/h]: 68.8



Throughput maximum [m³/h]: 68.8

Ref.:108746

02.06.2020 generated by

cristian.tudor@reflex-romania.ro

Dieselweg 2 - 48493 Wettringen - Tel.: 02557-93930 - Fax: 02557-939330
info@sinusverteiler.com - www.sinusverteiler.com

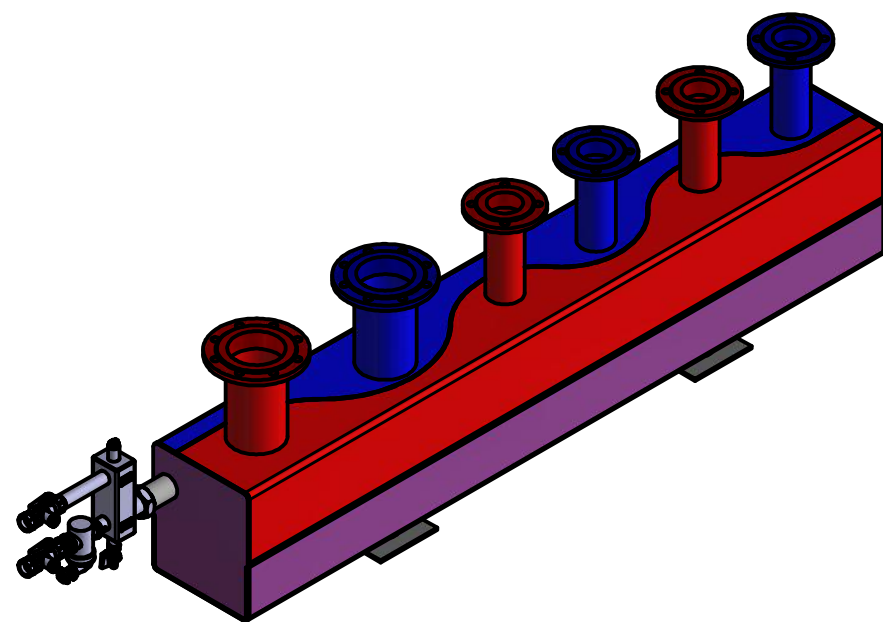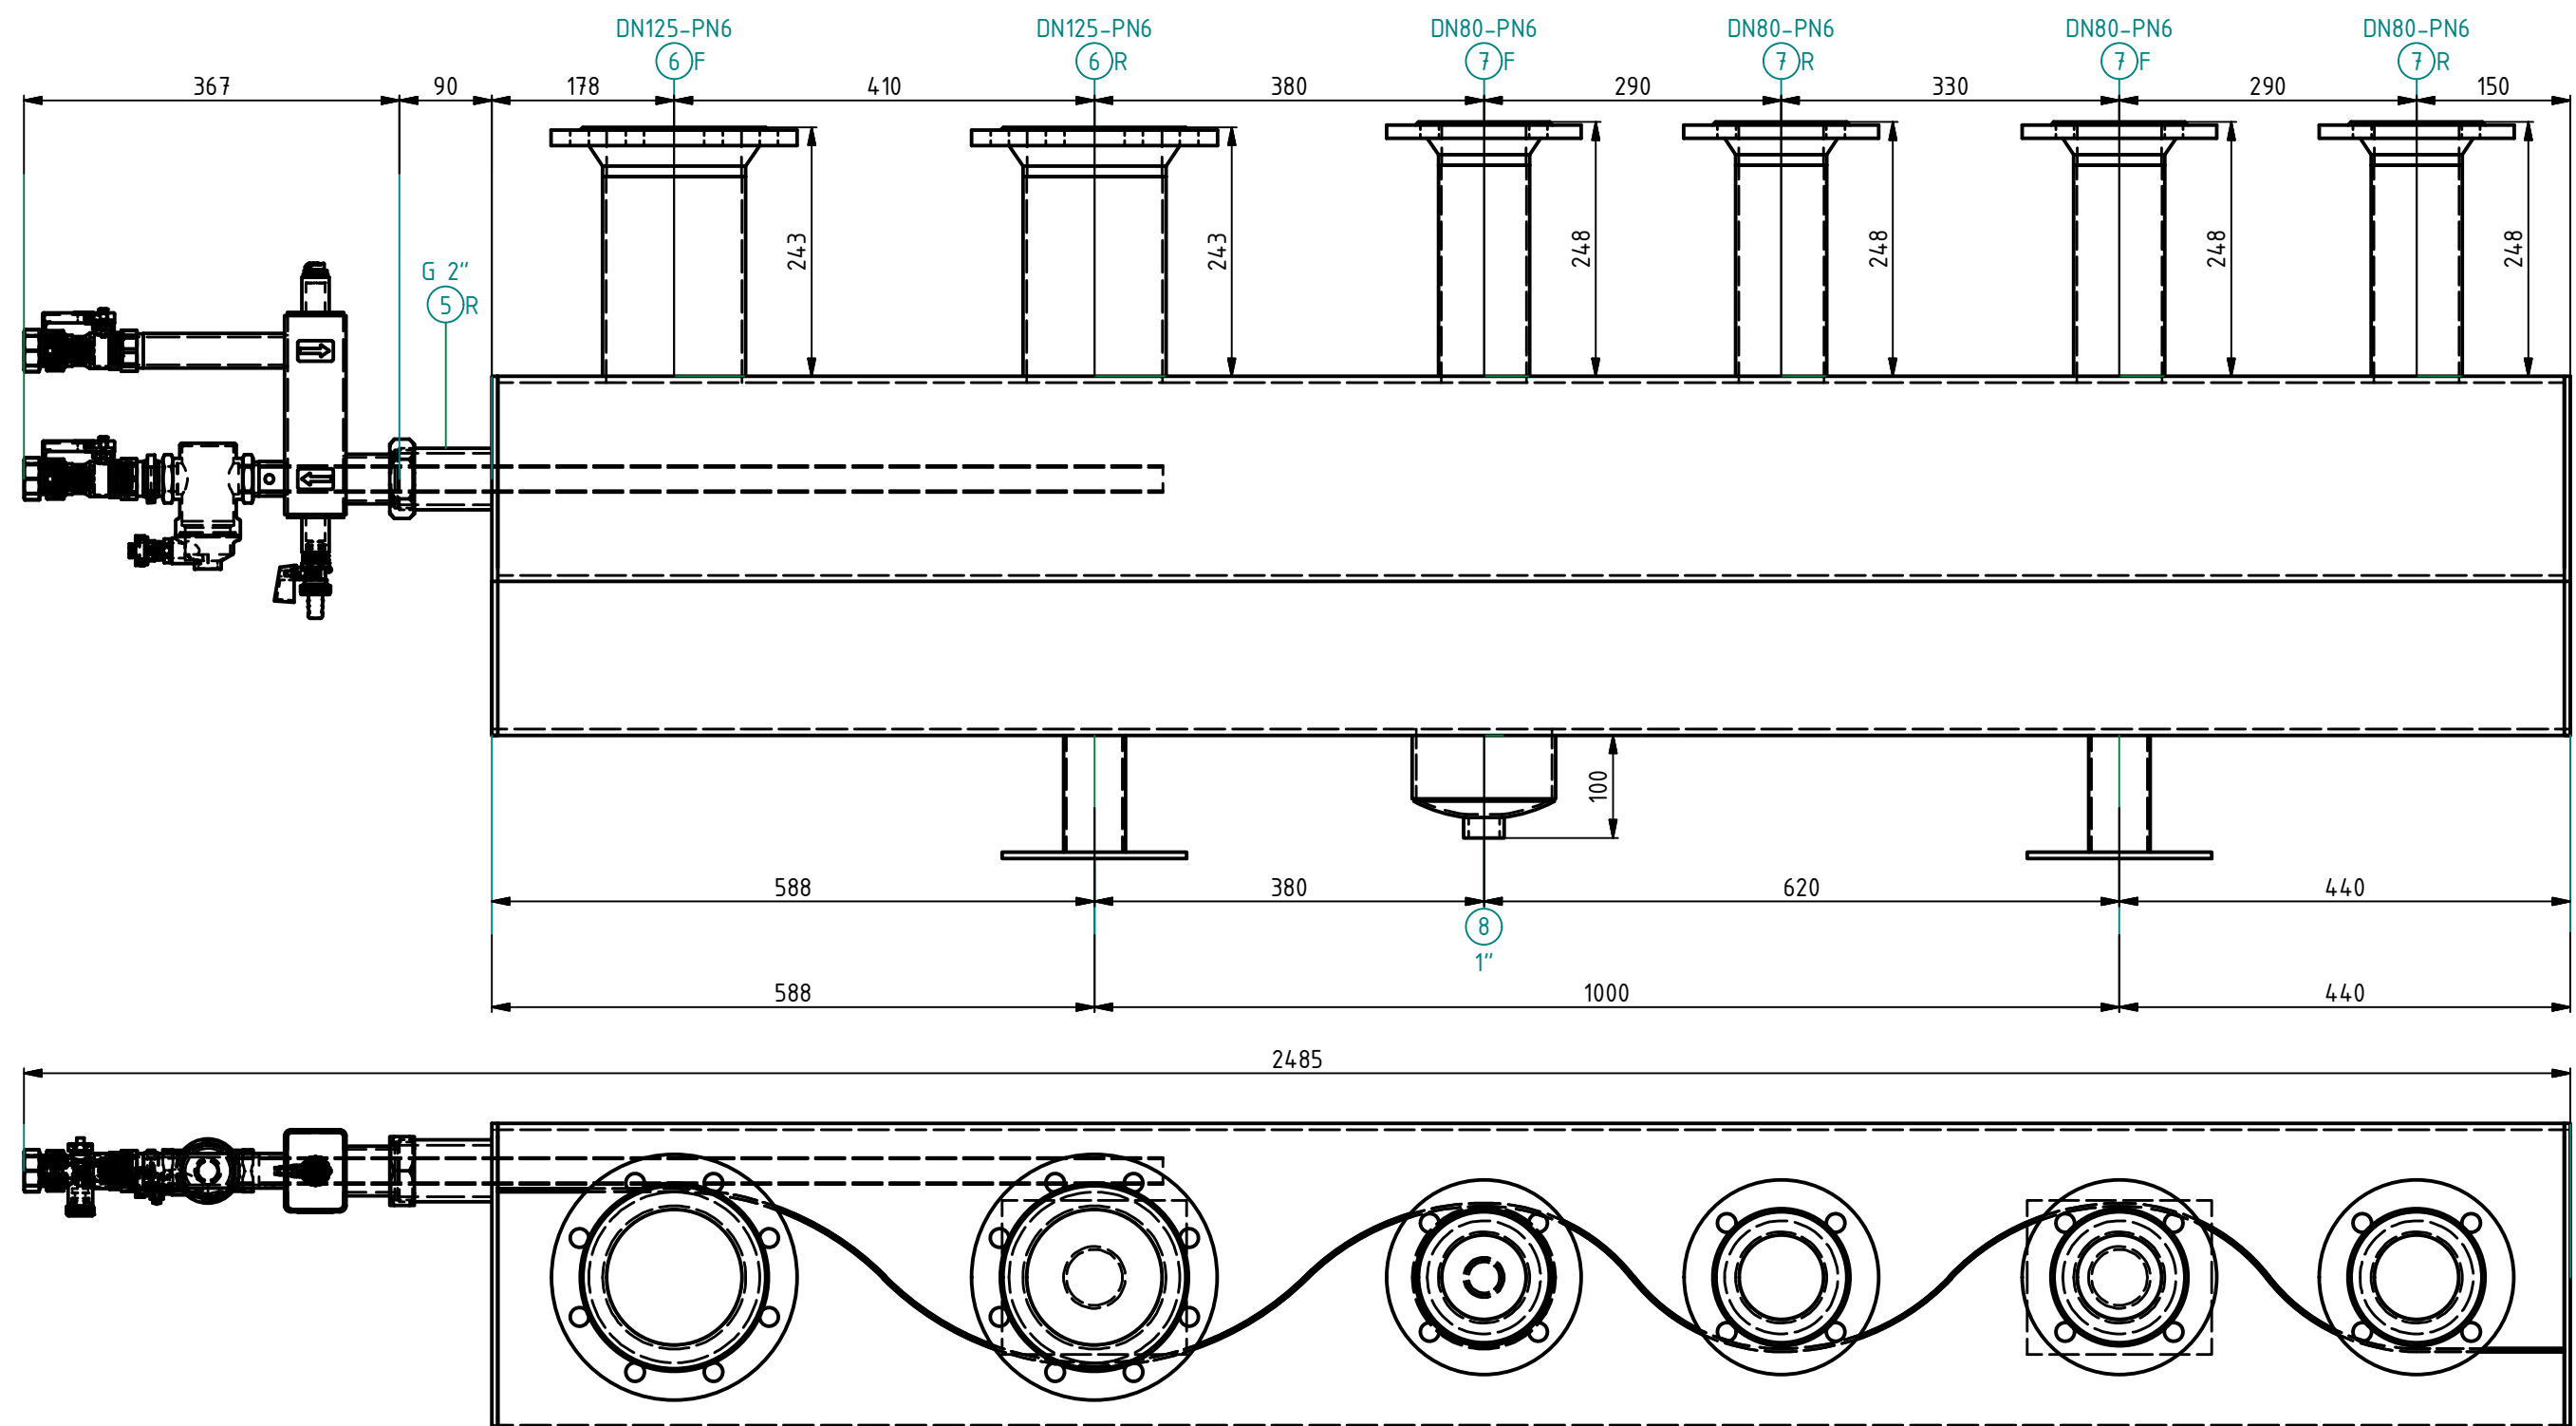

PRO SINUS[®]X

ProfiFixx 1600 kW, 6 racorduri, Bucuresti

Selection: HydroFixx + ProfiFixx 300/350

Facility: heating

Material: steel

Corpus length [mm]: 2028

Design pressure [bar]: 6

Design temperature [°C]: 110

Throughput (selected) [m³/h]: 68.8

Throughput maximum [m³/h]: 68.8

Ref.:108746

02.06.2020 generated by

cristian.tudor@reflex-romania.ro

Dieselweg 2 - 48493 Wetztingen - Tel.: 02557-93930 - Fax: 02557-939330
info@sinusverteiler.com - www.sinusverteiler.com

Project parts list

Pos.	Qty	Article	Description	Length
10	1	108746-10	HydroFixx + ProfiFixx 300/350 L=2028	2485
1	1	14-0-20-801	corpus 300/350 L=2028	2028
2	1	1-29-175	HydroFixx tray 300x150, L=2028	2028
3	1	1-41-019	HydroFixx end plates, 2 parts	
4	1	1-40-140	end plates, 2 parts	
5	1	G2-90	Außengewinde G 2"	90
6	2	2-01-042	flange DN125 PN6	243
7	4	2-01-036	flange DN80 PN6	248
8	1	1-99-418	Sludge trap DN125 with sleeve 1"	100
20	1	17-1-07-000	ProfiFixx support DN125	
30	2	17-7-47-340	ProfiFixx FPG-MK80 P65 / 340-230V	
40	1	25-0-42-800	Insulation 60 PUR+ST for 300/350 L=2148	2148
50	2	5-60-201_sl	Stand brackets short for 300/350	
60	1	5-80-300	Draining channel L=2	2485
70	2	5-60-110	stand bracket for draining channel	
80	1	5-80-445	coating black primed L=2028	2028
90	1	1-99-475	EasyFixx	
100	3	5-80-201	label plate blue	
110	3	5-80-200	label plate red	